

# THE SNORKLER



The Snorkler is a variable speed pump that greatly reduces the time spent caulking and chinking log homes. The self-priming pump applies caulk or chink directly from a straight-sided 5-gallon bucket. The Snorkler applies a smooth and consistently even bead, creating less need for tooling. Different size nozzles are also available for almost any application.

The Snorkler is made exclusively for Log Jam Chinking and Log Builder Log Sealant packed in straight-sided 5-gallon buckets.

## Features of the Snorkler


The Snorkler has an easy to use electric motor, which operates on standard 115 voltage, so no air compressor is needed. If there should happen to be a malfunction in the field, indicator lights will illuminate to identify the problem. A cutoff switch stops the pump when the pail is empty and large rubber tires on a sturdy cart allow for maneuverability.

## 90 Day Limited Warranty

All Snorkler parts (excluding the stator) are warranted against defects for a 90 day period. Parts are warranted under usage described in the instruction manual and are limited to parts replacement.

**For current pricing Ask Us!**

NOTE: do not use Perma-Chink® or Weatherall® chinking in the Sashco Snorkler. They are too thick and will burn out the Snorkler's pump. Perma-Chink is a registered trademark of the Perma-Chink Systems, Inc. Weatherall is a registered trademark of Weatherall, Inc.

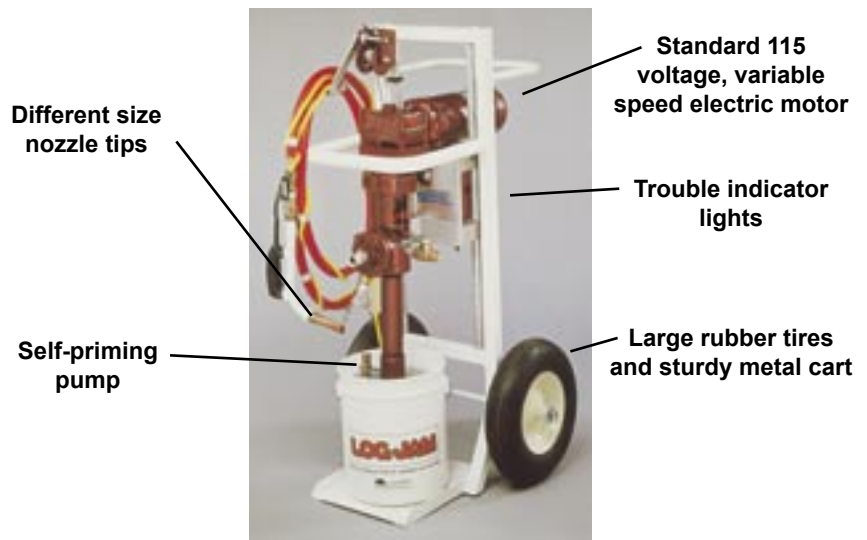

Snorkler Specifications		Expected Production Rates	
<b>Height:</b>	51"	<b>Joint Size</b>	<b>Speed</b>
<b>Width:</b>	25¾"	1" x ¼"	123 ft/min
<b>Depth:</b>	29"	2" x ¼"	31 ft/min
<b>Weight:</b>	285 lbs.	3" x ¼"	20 ft/min
<b>Shipping Weight:</b>	325 lbs.	4" x ¼"	15 ft/min
<b>Power:</b>	115 Volts AC	Expected Flow Rates .8 gallons per minute at high speed with 1-1/4" tip (Log Jam @ 70 F.). Flow rate is affected by length of hose, temperature, viscosity of material being pumped, size of tip used and the amount of wear (over time) on the stator.	
<b>Used With:</b>	5 gallon, straight sided pails only		
<b>Tip Sizes:</b>	¼", 1", 1¼" (standard equipment)	<b>Hose Length:</b>	25' (standard equipment)
<b>Stator:</b>	Rubber pump sleeve size 2L3, Buna-N Rubber; this part is the most subject to wear and will need to be replaced periodically.		

**1-800-359-6614**



**www.loghelp.com**